

SETUP INSTRUCTIONS FOR POPUP DISPLAYS

PLACEMENT OF CONTENTS IN CASE




Contents of case:
 Frame
 Channel Bars in Bag
 Panels
 Endcaps
 Halogen Light(s) (in lid or in case)
 Emergency Repair Kit

When stored, panels must be rolled with fabric/print outside.

UNPACKING YOUR DISPLAY

Unpack contents of the case as you need them.

- 1 Remove frame from case and place on a clean, level surface.
- 2 Position frame in front of you with hanging brackets at the top, and facing you. **A**

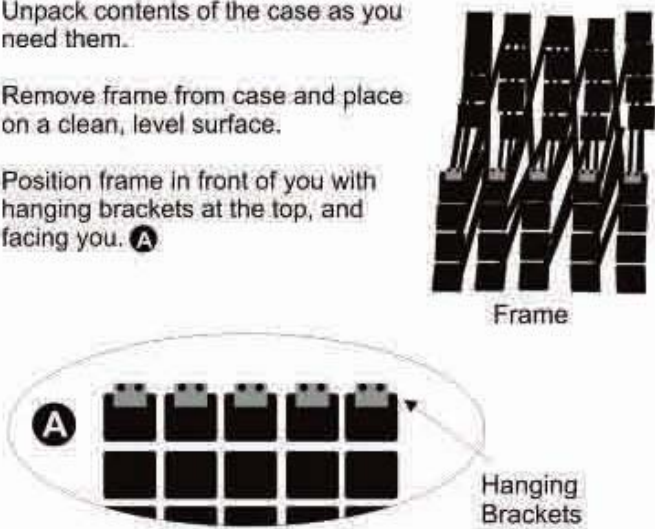


Frame

Hanging Brackets

ATTACHING THE LIGHTS


- 3 Remove cover to reveal light(s) in lid (for displays without light storage in lid, remove light(s) from box in case).
- 4 With frame still collapsed, flip up the bracket on the top node and slide light(s) onto mounting brackets. **B**

Control lights with on/off switch.

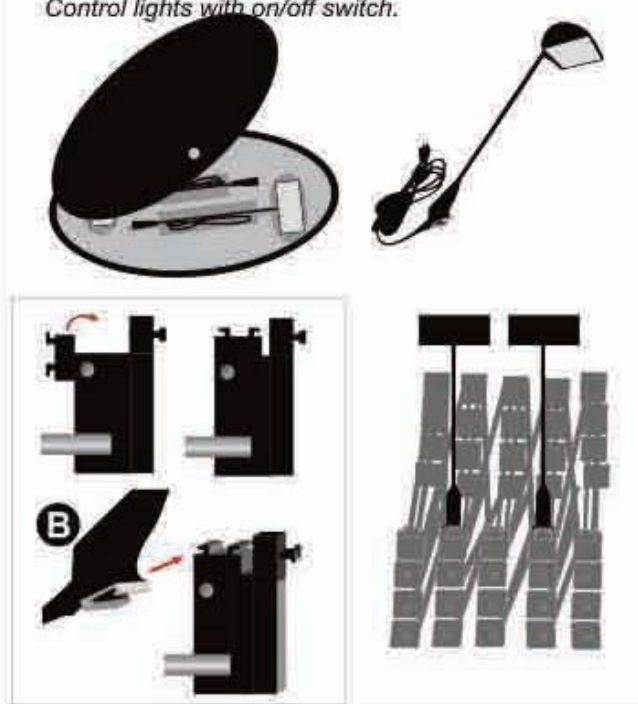

EXPANDING YOUR DISPLAY

- 5 Expand the frame by pulling up and out. The springs will contract. **C**
- 6 Starting at the top, attach channel bars to each node by first inserting the pointed end and then snapping the lock system into place. **D**

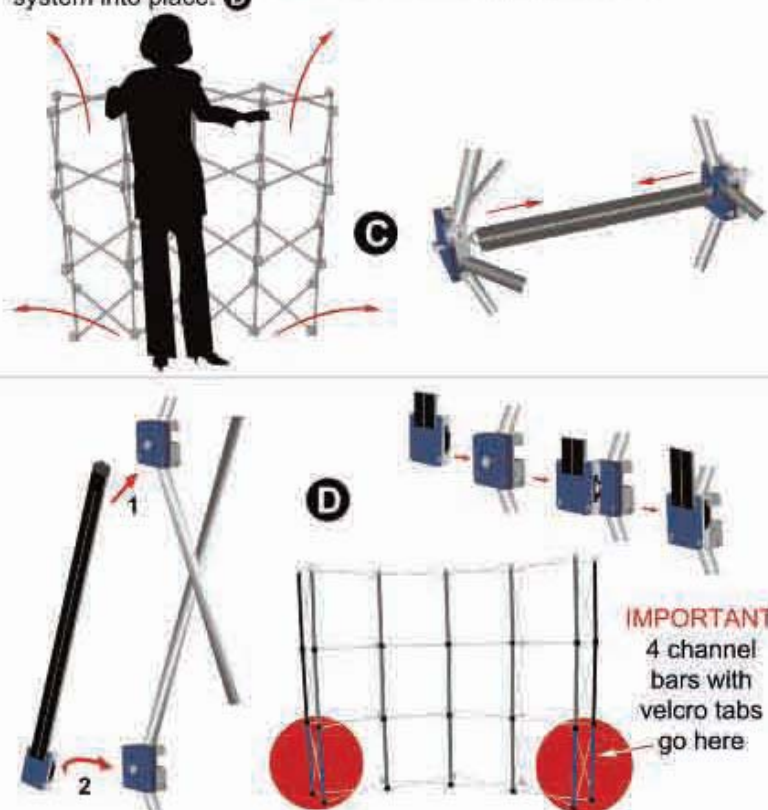


IMPORTANT:
 4 channel bars with velcro tabs go here.


SETUP INSTRUCTIONS FOR POPUP DISPLAYS

CONTINUED FROM FRONTSIDE

ATTACHING THE PANELS

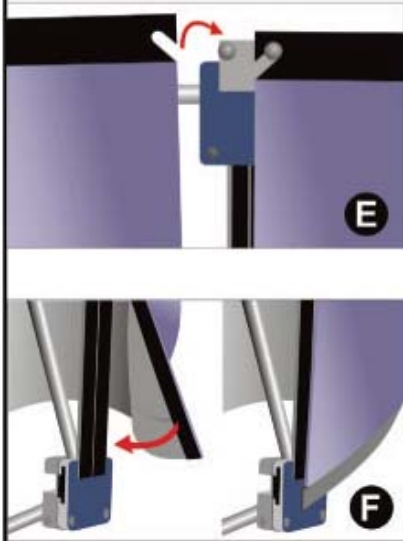

- 7 Panels and endcaps are marked on the back. Beginning with the center panels and working outward, hook each panel over the pegs on the hanging brackets. **E**
- 8 Starting at the top, smooth each panel down. Ensure that the magnetic strips are properly aligned. **F**
- 9 To install endcaps: (1) Attach the front hook at top (2) Wrap the endcap around the side and attach rear hook at top (3) Smooth both sides downwards at once, aligning magnetic strips. **G**

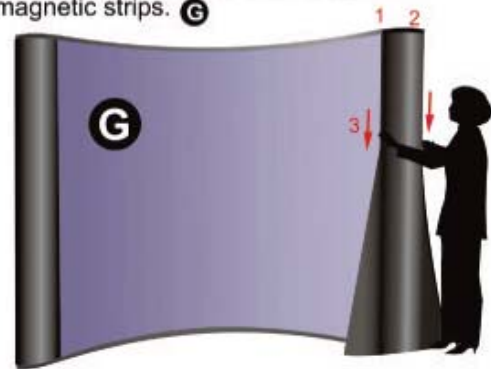

DISASSEMBLING & REPACKING

- 1 Detach panels and endcaps by starting at the bottom and peeling upwards, then unhooking. Place in the case **one at a time** rolled with fabric/print side out. **H**

IMPORTANT: panels must be placed as close as possible to the outside wall of the case to ensure room for the frame and channel bars.

- 2 Starting at the bottom, remove channel bars **I** and store in bag. Set aside.
- 3 To collapse frame, stand in the middle of the display. Pull the front and back sides apart as shown. The springs will expand and the display will collapse. **J**



- 4 Unhook light(s) from frame. Place in lid and attach cover. **K**
 (For displays without light storage in the lid, place lights in provided box and place in last.)
- 5 Place frame in case as shown. **L**
- 6 Place bag with channel bars in case as shown. **M**

